




Sight Installation Instructions 16AML/37ML Black Powder

Installation Directions: The sight should be driven into the barrel slot from the right-hand side. Use a soft metal punch or a piece of hard wood to drive in the sight. Be careful not to hit the folding leaf. If the sight is too tight, lightly file dovetail of the sight. If too loose, use paper shim in the barrel dovetail or carefully peen over edges.

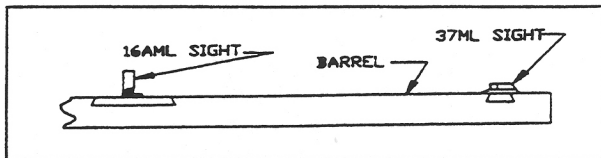

For Any Questions, Call Toll-Free
(800) 22-LYMAN
(Continental U.S. Only)

Lyman Products Corporation
475 Smith Street, Middletown CT 06457
Phone (860) 632-2020 Fax: (860) 632-1699